

**NEXT**  
**HOSPITALITY**  
Make New **OMOTENASHI**

**TAIJI**

**P R O D U C T   C A T A L O G**





## CONVERTIBLE CABI

Here is high-quality top selling products. These machines prepare either warm or cool towels for "omotenashi" or "hospitality" anytime.

### HC-11LX Pro

HOT&COOL 1door type



**NO COMPRESSOR**

Convertible



### HC-21LX Pro

HOT&COOL 2 door type



**NO COMPRESSOR**


Convertible



| Model                | HC-11LX Pro                                | HC-21LX Pro                                 |
|----------------------|--------------------------------------------|---------------------------------------------|
| Supply voltage       | AC220-240V 1ph                             | AC220-240V 1ph                              |
| Power consumption    | 150W                                       | 300W                                        |
| Outer dimensions     | W450xD363xH322 mm                          | W450xD363xH562 mm                           |
| Inner dimensions     | W348xD207xH152 mm                          | W348xD207xH152 mm x 2 doors                 |
| Capacity             | 11 liters                                  | 11 liters x 2 doors                         |
|                      | 55 hand towels<br>(approx. 20 face towels) | 110 hand towels<br>(approx. 40 face towels) |
| Net weight           | 10kg                                       | 17kg                                        |
| Tem. Control         | Electronics control/Peltier device         | Electronics control/Peltier device          |
| Cabinet inside temp. | HOT: 70-80°C(158-176°F)                    | HOT: 70-80°C(158-176°F)                     |
|                      | COOL: 7-10°C(44-50°F)                      | COOL: 7-10°C(44-50°F)                       |
| Accessories          | Basket x 1, drain tray x 1                 | Basket x 2, drain tray x 1                  |
| Safety standard      | CE                                         | CE                                          |

\* Towels are not included

#### Setting Location (COOL CABI)

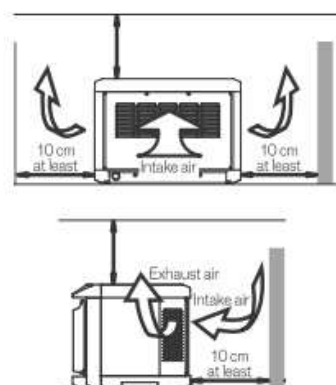



# HOTCABI/COOLCABI

Hot-selling and long seller item line of towel warmers and cooler are here to provide happiness and comfort.

## HC-6 Stylish and Compact!



HC-6 (W)  
White



HC-6 (SUS)  
Stainless steel



HC-6 (K)  
Black



## HC-8 Great in combination with the CC-8. High/low temperature setting

## CC-8

Stay cool! You can combine with the HC-8 for both warm and cool use



**NO COMPRESSOR**



● ASA resin adopted



● ASA resin adopted



| Model                | HC-6                         | HC-8                                           | CC-8                     |
|----------------------|------------------------------|------------------------------------------------|--------------------------|
| Supply voltage       | AC110-120V/1ph (W)           | -                                              | -                        |
|                      | AC220-240V 1ph (W),(K),(SUS) | AC220-240V 1ph                                 | AC220-240V 1ph           |
| Power consumption    | 120W                         | 140W                                           | 75W                      |
| Outer dimensions     | W300xD307xH230 mm            | W300xD340xH261 mm                              | W300xD340xH261 mm        |
| Inner dimensions     | W220xD220xH135 mm            | W227xD237xH152 mm                              | W227xD182xH152 mm        |
| Capacity             | 6 liters                     | 8 liters                                       | 6 liters                 |
|                      | 25-30 hand towels            | 35-45 hand towels                              | 25-35 hand towels        |
|                      | (approx. 10 face towels)     | (approx. 15 face towels)                       | (approx. 15 face towels) |
| Net weight           | 4kg                          | 4.5kg                                          | 5kg                      |
| Tem. Control         | Bimetal thermostat           | Bimetal thermostat                             | Peltier device           |
| Cabinet inside temp. | 70-80°C(158-176°F)           | L: 60-70°C(140-158°F)<br>H: 70-80°C(158-176°F) | 7-10°C(44-50°F)          |
| Safety device        | Thermal fuse                 | Thermal fuse                                   | -                        |
| Accessories          | Basket x 1, drain tray x 1   | Basket x1, drain tray x 1                      | Drain tray x 1           |
| Safety standard      | UL/cUL/CE                    | CE                                             | CE                       |

### Oshibori Towels



COO: Vietnam  
MATERIAL: Cotton 100%  
QTY: 100 doz/bale  
SIZE: ASK US



## HOTCABI

Upgraded cabi for advanced presentation that provides a welcome service and gracious expression of hospitality.

### HC-11UV Pro

UV lamp 1door type



Sterilizing UV lamp



### HC-38

Large capacity towel storage



HC-38

### HC-38UV

Large capacity towel storage with UV lamp



Sterilizing UV lamp



HC-38UV

| Model                | HC-11UV Pro                | HC-38                     | HC-38UV                   |
|----------------------|----------------------------|---------------------------|---------------------------|
| Supply voltage       | AC110-120V 1ph             | AC110-120V 1ph            | AC110-120V 1ph            |
|                      | AC220-240V 1ph             | AC220-240V 1ph            | -                         |
| Power consumption    | 190W                       | 400W                      | 400W                      |
| Outer dimensions     | W450xD363xH322 mm          | W450xD410xH450 mm         | W450xD410xH450 mm         |
| Inner dimensions     | W348xD207xH152 mm          | W360xD316.5xH345 mm       | W360xD316.5xH345 mm       |
| Capacity             | 11 liters                  | 38 liters                 | 38 liters                 |
|                      | 55 hand towels             | 150-200 hand towels       | 150-200 hand towels       |
|                      | (approx. 20 face towels)   | (approx. 66 face towels)  | (approx. 66 face towels)  |
| Net weight           | 7.5kg                      | 12kg                      | 12kg                      |
| Tem. Control         | Electronics control        | Bimetal thermostat        | Bimetal thermostat        |
| Cabinet inside temp. | 70-80°C(158-176°F)         | 70-80°C(158-176°F)        | 70-80°C(158-176°F)        |
| Safety device        | Thermal fuse               | Thermal fuse              | Thermal fuse              |
| Accessories          | Basket x 1, drain tray x 1 | Basket x3, drain tray x 1 | Basket x3, drain tray x 1 |
| Sterilizing lamp     | GTL-2 2W x 1               | -                         | GTL-2 2W x 3              |
| Safety standard      | ETL/cETL/CE                | CE                        | -                         |

\* Towels are not included ● UV lamp does not light up when the door is opened.

### Aromachip



Quantity: 30 chips/package  
Fragrance: 3 kinds  
Lemon, Jasmine, Forest





# FOODCABI

TAIJI food warmers are high capacity and great use for keeping prepared meal boxes or steamed egg custards. Good for quick "To-Go service, too.

## HC-50N

100V only

Door heater



\*Aluminum rack usage  
(Steamed egg custards x 36-44 pcs.)

## FC-50GN

100V only

Glass door



【OPTION】



Aluminum rack available  
(HC-38/HC-50N/FC-50GN)

## FC-100

100V only



## FC-100G

100V only

Glass door



| Model                | HC-50N                     | FC-50GN                    | FC-100                     | FC-100G                    |
|----------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Supply voltage       | AC100V/1ph                 | AC100V/1ph                 | AC100V/1ph                 | AC100V/1ph                 |
| Power consumption    | 500W                       | 500W                       | 720W                       | 720W                       |
| Outer dimensions     | W450xD419xH616 mm          | W450xD419xH616 mm          | W500xD502xH810 mm          | W500xD502xH810 mm          |
| Inner dimensions     | W350xD314xH450 mm          | W350xD314xH450 mm          | W400xD414xH615 mm          | W400xD414xH615 mm          |
| Capacity             | 50 liters                  | 50 liters                  | 100 liters                 | 100 liters                 |
| Net weight           | 14.5kg                     | 15.5kg                     | 27kg                       | 30kg                       |
| Tem. Control         | Bimetal thermostat         | Bimetal thermostat         | Variable thermostat        | Variable thermostat        |
| Cabinet inside temp. | 70-80°C (158-176°F)        | 70-80°C (158-176°F)        | 30-85°C (86-185°F)         | 30-85°C (86-185°F)         |
| Accessories          | Basket x 4, drain tray x 1 | Basket x 4, drain tray x 1 | Basket x 5, drain tray x 1 | Basket x 5, drain tray x 1 |

\* Bowls are not included



# Sake Warmer Dispenser

TAIJI sake warmer dispensers are capable of warming Japanese sake to a desirable temperature by a finger-tip operation



TS-1



TS-2



TSK-130B



TS-8

| Model                    | TS-1                                | TS-2                                   | TSK-130B                       | TS-8                                           |
|--------------------------|-------------------------------------|----------------------------------------|--------------------------------|------------------------------------------------|
| Supply voltage           | -                                   | AC110-120V 1ph                         | AC110-120V 1ph                 | -                                              |
|                          | AC220-240V 1ph                      | AC220-240V 1ph                         | -                              | AC220-240V 1ph                                 |
| Power consumption        | 0.6kw                               | 0.6kw                                  | 1.0kw                          | 0.5kw                                          |
| Sake feeder              | 1.8 bottle                          | 3.6L tank                              | Cubic Sake container (5-18L)   | 360ml bottle x 8<br>180ml bottle x 12          |
| Temp. control            | Variable thermostat                 | Variable thermostat                    | Variable thermostat            | Variable thermostat                            |
| Outer dimensions         | W160xD345xH483.5 mm                 | W160xD345xH625 mm                      | W250xD375xH515 mm              | W251xD196xH253 mm                              |
| Mini. Installation space | W360xD550xH916 mm                   | W360xD550xH850 mm                      | W310xD580xH825 mm              | -                                              |
| Net weight               | 5.8kg                               | 6.7kg                                  | 9.3kg                          | 3kg                                            |
| Safety device            | Line fuse                           | Line fuse                              | Line fuse                      | Line fuse                                      |
| Accessories              | Funnel, Cap, Anti-toppling brackets | Funnel, Filter, Anti-toppling brackets | Funnel, Drain tubing, Stopcock | Drain board, bottle cap, Thermometer(TST-100A) |

\* 1.8L sake bottle / serving bottle / Cubic sake container not included



## Electric Cool Plate

Stylish cooling device providing the ideal solution to keep fish or poultry chilled. Portable and perfect for cooling any kinds of chilled foods.

**NO COMPRESSOR**



CP-940(IB)



\* Drain cock for IB



CP-940(GK)



CP-940(GW)



CP-940

| Model                  | CP-940                       |
|------------------------|------------------------------|
| Supply voltage         | AC230V 1ph                   |
| Power consumption      | 450W                         |
| Outer dimensions       | W940xD440xH122 mm            |
| Plate dimensions       | W900xD400 mm                 |
| Option                 | CP-940/Standard plate        |
|                        | CP-940(GK)/with Black glass  |
|                        | CP-940(GW)/with White glass  |
|                        | CP-940(IB) with Acrylic case |
| Net weight             | 17kg                         |
| Heating/Cooling method | Peltier Device               |
| Tem. Control           | Electronics Control          |
| Temperature range      | 7°C±5°C(35-53°F)             |

\* Foods/ice cubes are image only



## Electric 2 in 1 Plate

Get 2 in 1 (hot or cool) function to save your space & cost.

**NO COMPRESSOR**



DP-555

100V only

\*Surface-Black aluminum plate



\*One touch mode switching "Hot⇌Cold"



| Model                  | DP-555                     |
|------------------------|----------------------------|
| Supply voltage         | AC100V 1ph                 |
| Power consumption      | 200W                       |
| Outer dimensions       | W555xD345xH120 mm          |
| Plate dimensions       | W511xD285 mm               |
| Net weight             | 8.5 kg                     |
| Heating/Cooling method | Peltier Device             |
| Tem. Control           | Electronics Control        |
| Temperature range      | Cool: 7°C±5°C/Hot:65°C±5°C |



# Infrared Heat Lamp

Heat lamps enhance your food presentation with outstanding design while keeping foods warm and looking great.

ILC-25



(G) gold




(S) stainless steel



(K) black

Adjustable pulley  
(Option)

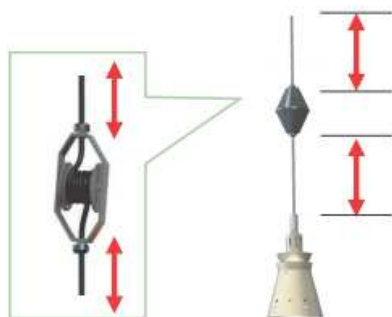

| Model             | ILC-25                     |
|-------------------|----------------------------|
| Supply voltage    | AC110-120V/220V 1ph        |
| Power consumption | 185W                       |
| Infrared lamp     | 185W(E27)                  |
| Outer dimensions  | dia170xH273mm              |
| Net weight        | 650g                       |
| Power cord        | 1.5m length (No plug head) |
| Color options     | (G)/(S)/(K)                |

SL-25(CL)

SL-25(BA)



Clamp type



Base plate type



- Portable!
- Flexible arm for lighting spot



Installation image: Buffet restaurant

| Model             | SL-25(BA)                    | SL-25(CL)                    |
|-------------------|------------------------------|------------------------------|
| Supply voltage    | AC220V 1ph                   | AC220V 1ph                   |
| Power consumption | 185W                         | 185W                         |
| Infrared lamp     | 185W(E27)                    | 185W(E27)                    |
| Outer dimensions  | W257xD366~600x<br>H650~800mm | W172xD350~600x<br>H650~800mm |
|                   | W257xD366mm (Base plate)     | W116xD133mm (Clamp)          |
| Net weight        | 4.9kg                        | 3.6kg                        |



# Electric Roaster

High-quality electric cookers for roasting sweet potatoes, commonly known as "YAKI-IMO" in Japanese. Great to roast tender, fluffy, delicious sweet potatoes through infrared effect.



100V only



TEY-101



TEY-202



Drawers with ball bearing slides



Wooden display box

| Model                    | TEY-101                     | TEY-202                     |
|--------------------------|-----------------------------|-----------------------------|
| Supply voltage           | AC100V 1ph                  | AC100V 1ph                  |
| Power consumption        | 1,190W                      | 1,470W                      |
| Outer dimensions         | W450xD450xH502 mm           | W450xD450xH662 mm           |
| Drawing inner dimensions | W283xD370xH95 mm            | W283xD370xH95 mm x 2drawers |
| Wooden display box       | W481xD418xH100 mm           | W481xD418xH100 mm           |
| Optimum capacity         | 3kg                         | 5kg                         |
| Maximum capacity         | 5kg                         | 10kg                        |
| Net weight               | 25kg                        | 32kg                        |
| Heating material         | Far-infrared sheath heater  | Far-infrared sheath heater  |
| Safety device            | Thermal fuse                | Thermal fuse                |
| Accessories              | Natural stones, Tongs, etc. | Natural stones, Tongs, etc. |



# Food Display Warmer

Countertop commercial food warmer display case keeps food at the perfect temperature for snack bars, concession stands, convenience stores or anywhere you need a heated food merchandiser.



OSL-600



- Adjustable angle shelf
- Attractive design
- LED light

100V only



OSL-900

| Model             | OSL-600                     | OSL-900                     |
|-------------------|-----------------------------|-----------------------------|
| Supply voltage    | AC100V 1ph                  | AC100V 1ph                  |
| Power consumption | 462W                        | 777W                        |
| Tem. Control      | 40-80°C                     | 40-80°C                     |
| Outer dimensions  | W603xD411xH535 mm           | W903 xD411xH535 mm          |
| Inner dimensions  | W590 x(D360/266)xH413 mm    | W890x(D360/266)xH413 mm     |
| Net weight        | 25kg                        | 38kg                        |
| Accessories       | Shelf rackx2,water tray x 1 | Shelf rackx2,water tray x 1 |

\* Foods are image only

## Gas and Electric Griller



Easy to install & easy to clean  
Use gas & Kosei ceramic charcoal



KA-75G



KA-95G



KA-115G

| Model            | KA-75G                          | KA-95G            | KA-115G            |
|------------------|---------------------------------|-------------------|--------------------|
| Outer dimensions | W740xD610xH384 mm               | W940xD610xH384 mm | W1140xD610xH384 mm |
| Heating area     | W600xD350 mm                    | W800xD350 mm      | W1,000xD350 mm     |
| Net weight       | 55 kg                           | 70kg              | 80kg               |
| Gas Consumption  | 15.7kW                          | 20.9kw            | 26.2kw             |
| Natural gas/LPG  |                                 |                   |                    |
| Gas connection   | 13 mm/Natural gas<br>9.5 mm/LPG | 20A               | 20A                |



Quick start heat-up to 850°C  
in 90 seconds!  
Smokeless and clean fire grate



3K-012XC



3H-210YC



3P-221WC

| Model             | 3K-012XC            | 3H-210YC                                                             | 3P-221WC            |
|-------------------|---------------------|----------------------------------------------------------------------|---------------------|
| Outer dimensions  | W1,080xD570xH480 mm | W720xD550xH400 mm                                                    | W1,200xD550xH380 mm |
| Heating area      | W800xD170 mm        | W520xD270 mm                                                         | W1,000xD300 mm      |
| Net weight        | 153 kg              | 151 kg                                                               | 229 kg              |
| Supply voltage    | 380V 3phs           | 380V 3phs                                                            | 380V 3phs           |
| Power consumption | 12.0 kW             | 10.2 kW                                                              | 21.0 kW             |
| Amperage ratings  | 19A                 | 16A                                                                  | 32A                 |
| Accessories       | Skewer cover x 1    | Iron bars x 1 set, grill net with<br>handles x 2, grill rack x 1 set | Iron bars x 1 set   |

## Beverage Warmer

 **NIPPON HEATER KIKI CO.,LTD.**



SW30-E2-L



PW45-E3-L

| Model             | SW30-E2-L         | PW45-E3-L         |
|-------------------|-------------------|-------------------|
| Outer dimensions  | W248xD425xH484 mm | W248xD425xH704 mm |
| Net weight        | 9 kg              | 12kg              |
| Capacity          | 350ml 30 pcs      | 350ml 45 pcs      |
| Supply voltage    | 220-240V 1ph      | 220-240V 1ph      |
| Power consumption | 295-349W          | 437-518W          |
| Temperature (can) | 53°C ±5°C         | 53°C ±5°C         |
| Lighting          | LED (1 x 3W)      | LED (1 x 3W)      |

## Bun Steamer

 **NIPPON HEATER KIKI CO.,LTD.**



MJ45B



100V only

| Model              | MJ45B                     |
|--------------------|---------------------------|
| Outer dimensions   | W400xD500xH743 mm         |
| Net weight         | 24.5 kg                   |
| Capacity           | 5 inner trays (315x315mm) |
| Supply voltage     | 100V 1ph                  |
| Power consumption  | 964W                      |
| Inside temperature | 75°C                      |
| Accessories        | Tong x 1                  |

## Ice Shaver

 **Swan.**



SI-100E



FM-800E

| Model             | SI-100E                                            | FM-800E                           |
|-------------------|----------------------------------------------------|-----------------------------------|
| Outer dimensions  | W300xD385xH671 mm                                  | W314xD415xH503 mm                 |
| Net weight        | 32 kg                                              | 26 kg                             |
| Ice type          | Block ice<br>(Shaving disc effective<br>dia 217mm) | Cube ice<br>(Dia 3cm x 70-75 pcs) |
| Shaving Capacity  | 2.2~2.8kg/min.                                     | 2.3~8.0kg/min.                    |
| Supply voltage    | 115V/220-240V 1ph                                  | 115V/220-240V 1ph                 |
| Power consumption | 210W/274-326W                                      | 210W/284-338W                     |
| Accessories       | Spare blade x 1, Drain hose x 1                    | Spare blade x 1, Drain hose x 1   |
| Safety standard   | CE                                                 | CE                                |

## Gas Rice Cooker

**COMET**



CRA2-100N-PS



CRA2-150N-PS

| Model                 | CRA2-100N-PS            | CRA2-150N-PS            |
|-----------------------|-------------------------|-------------------------|
| Outer dimensions      | W750xD707xH1200 mm      | W750xD707xH1300 mm      |
| Net weight            | 127kg                   | 183kg                   |
| Gas input/Natural gas | 20.9kw/h (18,000kcal/h) | 31.4kw/h (27,000kcal/h) |
| Gas input/LPG         | 20.9kw/h (1.50kg/h)     | 31.4kw/h (2.25kg/h)     |
| Gas connection        | 20 mm                   | 20 mm                   |
| Electric connection   | 220V-240V 1 ph (33W)    | 220V-240V 1 ph (48W)    |
| Cooking capacity      | 7kg (9L)x2              | 7kg (9L)x3              |

\* Bottles/cans and buns are image only



# TAIJI

TAIJI & CO., LTD. (JAPAN)  
Sales and Marketing International Division  
Address: 8-2, Okawa-cho, Kawasaki-ku,  
Kawasaki-shi, Kanagawa, 210-0858 JAPAN  
Phone: +81-44-329-6338  
Fax: +81-44-329-5860  
URL: <http://www.taiji.co.jp/e/overseas@taiji.co.jp>



24081500

\*Product specifications are subject to change without notice