

NEXT
HOSPITALITY
Make New **OMOTENASHI**

TAIJI

P R O D U C T C A T A L O G





CONVERTIBLE CABI

Here is high-quality top selling products. These machines prepare either warm or cool towels for "omotenashi" or "hospitality" anytime.

HC-11LX Pro

HOT&COOL 1door type



NO COMPRESSOR

Convertible



HC-21LX Pro

HOT&COOL 2 door type



NO COMPRESSOR


Convertible



Model	HC-11LX Pro	HC-21LX Pro
Supply voltage	AC220-240V 1ph	AC220-240V 1ph
Power consumption	150W	300W
Outer dimensions	W450xD363xH322 mm	W450xD363xH562 mm
Inner dimensions	W348xD207xH152 mm	W348xD207xH152 mm x 2 doors
Capacity	11 liters	11 liters x 2 doors
	55 hand towels (approx. 20 face towels)	110 hand towels (approx. 40 face towels)
Net weight	10kg	17kg
Tem. Control	Electronics control/Peltier device	Electronics control/Peltier device
Cabinet inside temp.	HOT: 70-80°C(158-176°F)	HOT: 70-80°C(158-176°F)
	COOL: 7-10°C(44-50°F)	COOL: 7-10°C(44-50°F)
Accessories	Basket x 1, drain tray x 1	Basket x 2, drain tray x 1
Safety standard	CE	CE

* Towels are not included

Setting Location (COOL CABI)

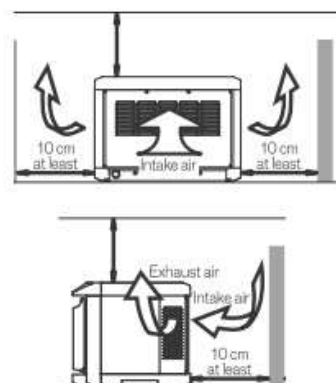



HOTCABI/COOLCABI

Hot-selling and long seller item line of towel warmers and cooler are here to provide happiness and comfort.

HC-6 Stylish and Compact!



HC-6 (W)
White



HC-6 (SUS)
Stainless steel



HC-6 (K)
Black

HC-8 Great in combination with the CC-8. High/low temperature setting

CC-8

Stay cool! You can combine with the HC-8 for both warm and cool use



NO COMPRESSOR



● ASA resin adopted



● ASA resin adopted



Model	HC-6	HC-8	CC-8
Supply voltage	AC110-120V/1ph (W)	-	-
	AC220-240V 1ph (W),(K),(SUS)	AC220-240V 1ph	AC220-240V 1ph
Power consumption	120W	140W	75W
Outer dimensions	W300xD307xH230 mm	W300xD340xH261 mm	W300xD340xH261 mm
Inner dimensions	W220xD220xH135 mm	W227xD237xH152 mm	W227xD182xH152 mm
Capacity	6 liters	8 liters	6 liters
	25-30 hand towels	35-45 hand towels	25-35 hand towels
	(approx. 10 face towels)	(approx. 15 face towels)	(approx. 15 face towels)
Net weight	4kg	4.5kg	5kg
Tem. Control	Bimetal thermostat	Bimetal thermostat	Peltier device
Cabinet inside temp.	70-80°C(158-176°F)	L: 60-70°C(140-158°F) H: 70-80°C(158-176°F)	7-10°C(44-50°F)
Safety device	Thermal fuse	Thermal fuse	-
Accessories	Basket x 1, drain tray x 1	Basket x1, drain tray x 1	Drain tray x 1
Safety standard	UL/cUL/CE	CE	CE

Oshibori Towels



COO: Vietnam
MATERIAL: Cotton 100%
QTY: 100 doz/bale
SIZE: ASK US



HOTCABI

Upgraded cabi for advanced presentation that provides a welcome service and gracious expression of hospitality.

HC-11UV Pro

UV lamp 1door type



Sterilizing UV lamp



HC-38

Large capacity towel storage



HC-38

HC-38UV

Large capacity towel storage with UV lamp



Sterilizing UV lamp



HC-38UV

Model	HC-11UV Pro	HC-38	HC-38UV
Supply voltage	AC110-120V 1ph	AC110-120V 1ph	AC110-120V 1ph
	AC220-240V 1ph	AC220-240V 1ph	-
Power consumption	190W	400W	400W
Outer dimensions	W450xD363xH322 mm	W450xD410xH450 mm	W450xD410xH450 mm
Inner dimensions	W348xD207xH152 mm	W360xD316.5xH345 mm	W360xD316.5xH345 mm
Capacity	11 liters	38 liters	38 liters
	55 hand towels	150-200 hand towels	150-200 hand towels
	(approx. 20 face towels)	(approx. 66 face towels)	(approx. 66 face towels)
Net weight	7.5kg	12kg	12kg
Tem. Control	Electronics control	Bimetal thermostat	Bimetal thermostat
Cabinet inside temp.	70-80°C(158-176°F)	70-80°C(158-176°F)	70-80°C(158-176°F)
Safety device	Thermal fuse	Thermal fuse	Thermal fuse
Accessories	Basket x 1, drain tray x 1	Basket x3, drain tray x 1	Basket x3, drain tray x 1
Sterilizing lamp	GTL-2 2W x 1	-	GTL-2 2W x 3
Safety standard	ETL/cETL/CE	CE	-

* Towels are not included ● UV lamp does not light up when the door is opened.

Aromachip



Quantity: 30 chips/package
Fragrance: 3 kinds
Lemon, Jasmine, Forest





FOODCABI

TAIJI food warmers are high capacity and great use for keeping prepared meal boxes or steamed egg custards. Good for quick "To-Go service, too.

HC-50N

100V only

Door heater



*Aluminum rack usage
(Steamed egg custards x 36-44 pcs.)

FC-50GN

100V only

Glass door



【OPTION】



Aluminum rack available
(HC-38/HC-50N/FC-50GN)

FC-100

100V only



FC-100G

100V only

Glass door



Model	HC-50N	FC-50GN	FC-100	FC-100G
Supply voltage	AC100V/1ph	AC100V/1ph	AC100V/1ph	AC100V/1ph
Power consumption	500W	500W	720W	720W
Outer dimensions	W450xD419xH616 mm	W450xD419xH616 mm	W500xD502xH810 mm	W500xD502xH810 mm
Inner dimensions	W350xD314xH450 mm	W350xD314xH450 mm	W400xD414xH615 mm	W400xD414xH615 mm
Capacity	50 liters	50 liters	100 liters	100 liters
Net weight	14.5kg	15.5kg	27kg	30kg
Tem. Control	Bimetal thermostat	Bimetal thermostat	Variable thermostat	Variable thermostat
Cabinet inside temp.	70-80°C (158-176°F)	70-80°C (158-176°F)	30-85°C (86-185°F)	30-85°C (86-185°F)
Accessories	Basket x 4, drain tray x 1	Basket x 4, drain tray x 1	Basket x 5, drain tray x 1	Basket x 5, drain tray x 1

* Bowls are not included



Sake Warmer Dispenser

TAIJI sake warmer dispensers are capable of warming Japanese sake to a desirable temperature by a finger-tip operation



TS-1



TS-2



TSK-130B



TS-8

Model	TS-1	TS-2	TSK-130B	TS-8
Supply voltage	-	AC110-120V 1ph	AC110-120V 1ph	-
	AC220-240V 1ph	AC220-240V 1ph	-	AC220-240V 1ph
Power consumption	0.6kw	0.6kw	1.0kw	0.5kw
Sake feeder	1.8 bottle	3.6L tank	Cubic Sake container (5-18L)	360ml bottle x 8 180ml bottle x 12
Temp. control	Variable thermostat	Variable thermostat	Variable thermostat	Variable thermostat
Outer dimensions	W160xD345xH483.5 mm	W160xD345xH625 mm	W250xD375xH515 mm	W251xD196xH253 mm
Mini. Installation space	W360xD550xH916 mm	W360xD550xH850 mm	W310xD580xH825 mm	-
Net weight	5.8kg	6.7kg	9.3kg	3kg
Safety device	Line fuse	Line fuse	Line fuse	Line fuse
Accessories	Funnel, Cap, Anti-toppling brackets	Funnel, Filter, Anti-toppling brackets	Funnel, Drain tubing, Stopcock	Drain board, bottle cap

* 1.8L sake bottle / serving bottle / Cubic sake container not included



Electric Cool Plate

Stylish cooling device providing the ideal solution to keep fish or poultry chilled. Portable and perfect for cooling any kinds of chilled foods.

NO COMPRESSOR



CP-940(IB)



* Drain cock for IB



CP-940(GK)



CP-940(GW)



CP-940

Model	CP-940
Supply voltage	AC230V 1ph
Power consumption	450W
Outer dimensions	W940xD440xH122 mm
Plate dimensions	W900xD400 mm
Option	CP-940/Standard plate
	CP-940(GK)/with Black glass
	CP-940(GW)/with White glass
	CP-940(IB) with Acrylic case
Net weight	17kg
Heating/Cooling method	Peltier Device
Tem. Control	Electronics Control
Temperature range	7°C±5°C(35-53°F)

* Foods/ice cubes are image only



Electric 2 in 1 Plate

Get 2 in 1 (hot or cool) function to save your space & cost.

NO COMPRESSOR



DP-555

100V only

*Surface-Black aluminum plate

Model	DP-555
Supply voltage	AC100V 1ph
Power consumption	200W
Outer dimensions	W555xD345xH120 mm
Plate dimensions	W511xD285 mm
Net weight	8.5 kg
Heating/Cooling method	Peltier Device
Tem. Control	Electronics Control
Temperature range	Cool: 7°C±5°C/Hot:65°C±5°C



*One touch mode switching "Hot⇌Cold"





Infrared Heat Lamp

Heat lamps enhance your food presentation with outstanding design while keeping foods warm and looking great.

ILC-25



(G) gold




(S) stainless steel



(K) black

Adjustable pulley
(Option)

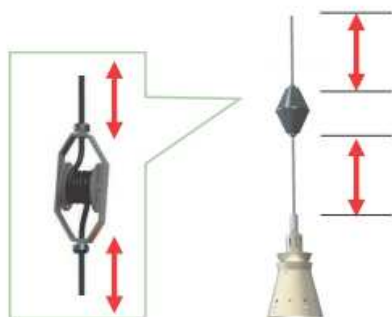

Model	ILC-25
Supply voltage	AC110-120V/220V 1ph
Power consumption	185W
Infrared lamp	185W(E27)
Outer dimensions	dia170xH273mm
Net weight	650g
Power cord	1.5m length (No plug head)
Color options	(G)/(S)/(K)

SL-25(CL)

SL-25(BA)



Clamp type



Base plate type



- Portable!
- Flexible arm for lighting spot



Installation image: Buffet restaurant

Model	SL-25(BA)	SL-25(CL)
Supply voltage	AC220V 1ph	AC220V 1ph
Power consumption	185W	185W
Infrared lamp	185W(E27)	185W(E27)
Outer dimensions	W257xD366~600x H650~800mm	W172xD350~600x H650~800mm
	W257xD366mm (Base plate)	W116xD133mm (Clamp)
Net weight	4.9kg	3.6kg



Electric Roaster

High-quality electric cookers for roasting sweet potatoes, commonly known as "YAKI-IMO" in Japanese. Great to roast tender, fluffy, delicious sweet potatoes through infrared effect.



100V only



TEY-101



TEY-202



Drawers with ball bearing slides



Wooden display box

Model	TEY-101	TEY-202
Supply voltage	AC100V 1ph	AC100V 1ph
Power consumption	1,190W	1,470W
Outer dimensions	W450xD450xH502 mm	W450xD450xH662 mm
Drawing inner dimensions	W283xD370xH95 mm	W283xD370xH95 mm x 2drawers
Wooden display box	W481xD418xH100 mm	W481xD418xH100 mm
Optimum capacity	3kg	5kg
Maximum capacity	5kg	10kg
Net weight	25kg	32kg
Heating material	Far-infrared sheath heater	Far-infrared sheath heater
Safety device	Thermal fuse	Thermal fuse
Accessories	Natural stones, Tongs, etc.	Natural stones, Tongs, etc.



Food Display Warmer

Countertop commercial food warmer display case keeps food at the perfect temperature for snack bars, concession stands, convenience stores or anywhere you need a heated food merchandiser.



OSL-600



● Adjustable angle shelf ● Attractive design ● LED light

100V only



OSL-900

Model	OSL-600	OSL-900
Supply voltage	AC100V 1ph	AC100V 1ph
Power consumption	462W	777W
Tem. Control	40-80°C	40-80°C
Outer dimensions	W603xD411xH535 mm	W903 xD411xH535 mm
Inner dimensions	W590 x(D360/266)xH413 mm	W890x(D360/266)xH413 mm
Net weight	25kg	38kg
Accessories	Shelf rackx2,water tray x 1	Shelf rackx2,water tray x 1

* Foods are image only

Gas and Electric Griller



Easy to install & easy to clean
Use gas & Kosei ceramic charcoal



KA-75G



KA-95G




KA-115G

Model	KA-75G	KA-95G	KA-115G
Outer dimensions	W740xD610xH384 mm	W940xD610xH384 mm	W1140xD610xH384 mm
Heating area	W600xD350 mm	W800xD350 mm	W1,000xD350 mm
Net weight	55 kg	70kg	80kg
Gas Consumption	15.7kW	20.9kw	26.2kw
Natural gas/LPG			
Gas connection	13 mm/Natural gas 9.5 mm/LPG	20A	20A



Quick start heat-up to 850°C
in 90 seconds!
Smokeless and clean fire grate



3K-012XC



3H-210YC



3P-221WC

Model	3K-012XC	3H-210YC	3P-221WC
Outer dimensions	W1,080xD570xH480 mm	W720xD550xH400 mm	W1,200xD550xH380 mm
Heating area	W800xD170 mm	W520xD270 mm	W1,000xD300 mm
Net weight	153 kg	151 kg	229 kg
Supply voltage	380V 3phs	380V 3phs	380V 3phs
Power consumption	12.0 kW	10.2 kW	21.0 kW
Amperage ratings	19A	16A	32A
Accessories	Skewer cover x 1	Iron bars x 1 set, grill net with handles x 2, grill rack x 1 set	Iron bars x 1 set

Beverage Warmer

 **NIPPON HEATER KIKI CO.,LTD.**



SW30-E2-L



PW45-E3-L

Model	SW30-E2-L	PW45-E3-L
Outer dimensions	W248xD425xH484 mm	W248xD425xH704 mm
Net weight	9 kg	12kg
Capacity	350ml 30 pcs	350ml 45 pcs
Supply voltage	220-240V 1ph	220-240V 1ph
Power consumption	295-349W	437-518W
Temperature (can)	53°C ±5°C	53°C ±5°C
Lighting	LED (1 x 3W)	LED (1 x 3W)

Bun Steamer

 **NIPPON HEATER KIKI CO.,LTD.**



MJ45B



100V only

Model	MJ45B
Outer dimensions	W400xD500xH743 mm
Net weight	24.5 kg
Capacity	5 inner trays (315x315mm)
Supply voltage	100V 1ph
Power consumption	964W
Inside temperature	75°C
Accessories	Tong x 1

Ice Shaver

 **Swan.**



SI-100E



FM-800E

Model	SI-100E	FM-800E
Outer dimensions	W300xD385xH671 mm	W314xD415xH503 mm
Net weight	32 kg	26 kg
Ice type	Block ice (Shaving disc effective dia 217mm)	Cube ice (Dia 3cm x 70-75 pcs)
Shaving Capacity	2.2~2.8kg/min.	2.3~8.0kg/min.
Supply voltage	115V/220-240V 1ph	115V/220-240V 1ph
Power consumption	210W/274-326W	210W/284-338W
Accessories	Spare blade x 1, Drain hose x 1	Spare blade x 1, Drain hose x 1
Safety standard	CE	CE

Gas Rice Cooker

COMET



CRA2-100N-PS



CRA2-150N-PS

Model	CRA2-100N-PS	CRA2-150N-PS
Outer dimensions	W750xD707xH1200 mm	W750xD707xH1300 mm
Net weight	127kg	183kg
Gas input/Natural gas	20.9kw/h (18,000kcal/h)	31.4kw/h (27,000kcal/h)
Gas input/LPG	20.9kw/h (1.50kg/h)	31.4kw/h (2.25kg/h)
Gas connection	20 mm	20 mm
Electric connection	220V-240V 1 ph (33W)	220V-240V 1 ph (48W)
Cooking capacity	7kg (9L)x2	7kg (9L)x3

* Bottles/cans and buns are image only



TAIJI

TAIJI & CO., LTD. (JAPAN)
Sales and Marketing International Division
Address: 8-2, Okawa-cho, Kawasaki-ku,
Kawasaki-shi, Kanagawa, 210-0858 JAPAN
Phone: +81-44-329-6338
Fax: +81-44-329-5860
URL: <http://www.taiji.co.jp/e/overseas@taiji.co.jp>



24081500

*Product specifications are subject to change without notice