



# TAIJI

PRODUCT CATALOG

**NEXT**   
**HOSPITALITY**  
Make New **OMOTENASHI**



# Pro Cabi UV model

## HC-11UV Pro

UV lamp model  
1 door type

Sterilizing UV lamp



Functional! High-spec!



## HC-21UV Pro

UV lamp model  
2 door type

Sterilizing UV lamp



- Chemical resistance plastic reduces chemical attack cracking.

- Great temperature control system and better heat permeability provide additional stability.

● UV lamp does not light up when the door is opened.

Model	HC-11UV Pro	HC-21UV Pro
Supply voltage	AC110-120V	AC110-120V
	AC220-240V	AC220-240V
Power consumption	190W	380W
Outer dimensions	W450 x D363 x H322 mm	W450 x D363 x H562 mm
Inner dimensions	W348 x D207 x H152 mm	W348 x D207 x H152 mm x 2 door
Capacity	11 liters	11 liters x 2 door
	55 hand towels ( approx. 25 face towels )	110 hand towels ( approx. 50 face towels )
Net weight	7.5 kg	11.5 kg
Tem. control	Electronics control	Electronics control
Cabinet inside temp.	70-80°C (158-176°F)	70-80°C (158-176°F)
Accessories	Basket x 1, drain tray x 1	Basket x 2, drain tray x 1
Sterilizing lamp	GTL-2 2W x 1	GTL-2 2W x 2
Safety standard	ETL / cETL / CE	ETL / cETL / CE

Towels are not included.

# Pro Cabi HOT & COOL

## HC-11LX Pro

HOT & COOL CONVERTIBLE CABI  
1 door type

Convertible



Simple and Easy!



- Easy control by simple control panel with pictograph. Also easy to see the operating mode with LED light.

## HC-21LX Pro

HOT & COOL CONVERTIBLE CABI  
2 door type

Convertible



- Smooth touch control panel is located upper side that reduces contamination by foreign objects.

	HC-11LX Pro	HC-21LX Pro
Supply voltage	- AC220-240V	- AC220-240V
Power consumption	150W	300W
Outer dimensions	W450 x D363 x H322 mm	W450 x D363 x H562 mm
Inner dimensions	W348 x D207 x H152 mm	W348 x D207 x H152 mm x 2 door
Capacity	11 liters 55 hand towels ( approx. 25 face towels )	11 liters x 2 door 110 hand towels ( approx. 50 face towels )
Net weight	10 kg	17 kg
Tem. control	Electronics control / Peltier device	Electronics control / Peltier device
Cabinet inside temp.	HOT : 70-80°C ( 158-176°F ) COOL : 7-10°C ( 44-50°F )	HOT : 70-80°C ( 158-176°F ) COOL : 7-10°C ( 44-50°F )
Accessories	Basket x 1, drain tray x 1	Basket x 2, drain tray x 1
Sterilizing lamp	-	-
Safety standard	CE	CE

Towels are not included.

# HOTCABI/COOLCABI

Hot-selling and long seller item line of towel warmers and cooler are here to provide happiness and comfort.

## HC-6 Stylish and Compact!



HC-6 (W)  
White



HC-6 (SUS)  
Stainless steel



HC-6 (K)  
Black

## HC-8 Great in combination with the CC-8. High/low temperature setting

High durability  
ASA resin adopted



HC-8

**Joint plate** (sold separately)

## CC-8 Stay cool! You can combine with the HC-8 for both warm and cool use

**COOL CABI**

High durability  
ASA resin adopted



CC-8

Model	HC-6	HC-8	CC-8
Supply voltage	AC110-120V (W)	AC220-240V	AC220-240V
	AC220-240V (W), (K), (SUS)		
Power consumption	120W	140W	75W
Outer dimensions	W300 x D307 x H230 mm	W300 x D340 x H261 mm	W300 x D340 x H261 mm
Inner dimensions	W220 x D220 x H135 mm	W227 x D237 x H152 mm	W227 x D182 x H152 mm
Capacity	6 liters	8 liters	6 liters
	25-30 hand towels (approx. 10 face towels)	35-45 hand towels (approx. 15 face towels)	
Net weight	4 kg	4.5 kg	5 kg
Tem. control	Bimetal thermostat	Bimetal thermostat	Peltier device
Cabinet inside temp.	70-80°C (158-176°F)	L: 60-70°C, H: 70-80°C (L: 140-158°F, H: 158-176°F)	7-10°C (44-50°F)
Safety device	Thermal fuse	Thermal fuse	-
Accessories	Basket x 1, drain tray x 1	Basket x 1, drain tray x 1	Drain tray x 1
Sterilizing lamp	-	-	-
Safety standard	UL / cUL / CE (Nemko)	CE (Nemko)	CE (Semko)

# HC-38 Large capacity towel storage



HC-38

# HC-38UV Large capacity towel storage with sterilizing UV lamps



Sterilizing UV lamp

HC-38UV

Model	HC-38	HC-38 UV
Supply voltage	AC110-120V AC220-240V	AC110-120V
Power consumption	400W	400W
Outer dimensions	W450 x D410 x H450 mm	W450 x D410 x H450 mm
Inner dimensions	W360 x D316.5 x H345 mm	W360 x D316.5 x H345 mm
Capacity	38 liters 150-200 hand towels (approx. 66 face towels)	38 liters 150-200 hand towels (approx. 66 face towels)
Net weight	12 kg	12 kg
Tem. control	Bimetal thermostat	Bimetal thermostat
Cabinet inside temp.	70-80°C ( 158-176°F )	70-80°C ( 158-176°F )
Safety device	Thermal fuse	Thermal fuse
Accessories	Basket x 3, drain tray x 1	Basket x 3, drain tray x 1
Sterilizing lamp	-	GTL-2 2W x 3
Safety standard	CE	-

● UV lamp does not light up when the door is opened.

## Oshibori Towels



Oshibori ( cotton 100% )					
Model number	60 Monme	70 Monme	80 Monme	90 Monme	100 Monme
Weight /dz	230g	265g	300g	338g	375g
Size	28 x 28 cm			30 x 30 cm	31 x 31 cm
	8 x 8	8 x 8	4 x 4	Plain	Plain
COO	Vietnam				
Remarks	100dz/bale				



### aromachip

A variety of fragrances are available.

Create your own fragrances of relaxation with aromachip. It's ideal to use with TAJI towel warmer.

Quantity: 30 chips/package  
Fragrance: 3 kinds  
Lemon, Jasmine, Forest

# Sake Warmer Dispenser

TAIJI sake warmer dispensers are capable of warming Japanese sake to a desirable temperature by a finger-tip operation.



TS-1



TS-2



TSK-130B

● Ti series has been minor changed to TS (Ti-1→TS-1, Ti-2→TS-2)

Model	TS-1	TS-2	TSK-130B
Supply voltage	220-240V	AC110-120V / 220-240V	AC110-120V
Power consumption	0.6kw	0.6kw	1.0kw
Sake feeder	1.8L bottle	3.6L tank	Cubic Sake container ( 5-18L )
Tem. control	Variable thermostat	Variable thermostat	Electronics control
Safety device	Line fuse	Line fuse	Line fuse
Heating method	Indirect via water bath	Indirect via water bath	Indirect via water bath
Outer dimensions	W160 x D345 x H483.5 mm	W160 x D345 x H625 mm	W250 x D375 x H515 mm
Mini. Installation space	W360 x D550 x H916 mm	W360 x D550 x H850 mm	W300 x D375 x H815 mm
Net weight	5.8 kg	6.7 kg	9.3 kg
Accessoris	Funnel,Capper, Anti-toppling Brackets	Funnel, Filter, Anti-toppling Brackets	Funnel, A Stopcock

1.8L sake bottle / serving bottle / Cubic sake container not included

# Sake Warmer & Sake Thermometer

Countertop heartwarming presentation for serving tasty and perfect warmed sake.



HS-03

**DISCONTINUED**



**\*While stocks last**



TST-100A

Model	HS-03
Supply voltage	AC110-240V
Power consumption	500W
Materials	Akita cedar / Stainless steel
Outer dimensions	W300 x D183 x H231 mm
Inner dimensions	W260 x D116 x H124 mm
Capacity	360ml bottle x 3
	180ml bottle x 6
	Chirori tumbler x 2
Net weight	3 kg
Tem. control	Variable thermostat
Temperature	30-90°C (86-194°F)
Accessories	Lid x 1, Drain board x 1, Bottle Cap x 1 Thermometer x 1, Holder x 1, Power cord x 1
Safety standard	-



Serving bottle (black) 320cc / (white) 150cc  
Available on the demand

Model	TST-100A
Lithium battery	CR2032 x 1
Temperature measurement range	-50°C to 300°C (-58 to 572°F)
Dimensions / Net weight	Length 223 x W34 x Thickness 15 mm / 35g
Probe	Φ4 x 146
Package dimensions	250 x 100 x 20 mm
Accessories	Cap x 1 / Lithium battery x 1

Standard accessory for sake warmer  
Also sold separately

Serving bottle / sake cup not included  
Available on the demand



TS-8



Wooden frame  
(Option)

**DISCONTINUED**

**100V only**

Model	TS-8
Supply voltage	AC100V
Power consumption	0.5kw
Materials	Stainless steel
Outer dimensions	W251 x D196 x H253 mm
Inner dimensions	W249 x D194 x H170 mm
Capacity	360ml bottle x 8
	180ml bottle x 12
Net weight	3 kg
Tem. control	Variable thermostat
Temperature	30-90°C (86-194°F)
Accessories	Lid x 1, Drainboard x 1, Bottle Cap x 1 Thermometer x 1
Safety standard	-

Serving bottle / sake cup not included

# Cool plate

Our stylish cooling device providing the ideal solution to keep fish or poultry chilled.  
TAIJI electric food cooling plate perfects for any kinds of chilled foods.



CP-940(IB)



Model	CP-940
Supply voltage	AC230V
Power consumption	450W
Plate dimensions	W900 x D400 mm
Outer dimensions	W940 x D440 x H122 mm
Option	CP-940 / Standard Plate
	CP-940(GW) / with White Glass
	CP-940(GK) / with Black Glass
	CP-940(IB) / with Acrylic Case
Net weight	17kg
Tem. control	Peltier device
Temperature	7±5°C (35-53°F)
	(at an ambient temperature 25°C)
Accessories	Depending on option
Safety standard	-

Foods/ice cubes are image only



CP-940(GK)



CP-940(GW)



CP-940

# Electric Roaster

This is perfect cooker for Root vegetables, especially roasted sweet potato which call YAKI-IMO. Great use for prosperous facilities!

100V only



TEY-101



TEY-202



Model	TEY-101	TEY-202
Supply voltage	AC100V	
Power consumption	1190W	1470W
Heating material	Far-infrared sheath heater	
Safety device	Overtemp. prevention device	
Outer dimensions	W450 x D450 x H502 mm	W450 x D450 x H662 mm
Drawing inner dimensions	W283 x D370 x H95 mm	W283 x D370 x H95 mm x 2
Wooden box	W481 x D418 x H100	
Net weight	25kg	32kg
Optimum capacity	3kg	5kg
Maximum capacity	5kg	10kg
Accessories	Natural stones / Tongs etc	



# Infrared Heat Lamp

Heat lamps enhance your food presentation with outstanding design while keeping foods warm and looking great.

## ILC-25



(G) gold




(S) stainless steel



(K) black

Adjustable pulley  
(Option)

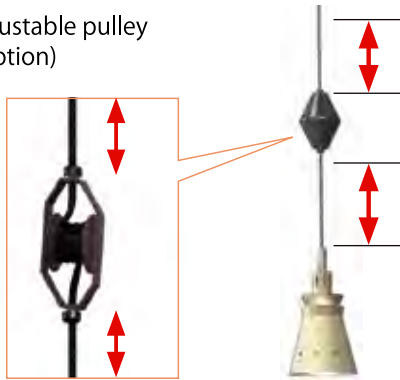

Model	ILC-25
Supply voltage	AC110-120V / 220V
Power consumption	185W
Infrared lamp	185W (E27)
Outer dimensions	Φ170 x H257mm
Net weight	650 g
Power cord	1.5m power cord
ColorVariation	(G) / (S) / (K)

## SL-25(CL)




Clamp type

## SL-25(BA)



Base plate type



Clamp size W116 x D133



Base plate size W257 x D366

Model	SL-25
Supply voltage	AC110-120V / 220V
Power consumption	185W
Infrared lamp	185W (E27)
Outer dimensions	W257 x D366~600 x H650~800 mm W257 x D366 mm (Base plate)
Net weight	4.9 kg
Power Cord	2m power cord
Variation	(BA) / (CL)

# Gas and Electric Griller



Very fuel efficient as it utilizes infrared heating to reach extremely high temperatures comparable to charcoal using less gas and directly heats foods instead of heating the air, therefore retaining more moisture. Also capable of using charcoal to give foods additional scent and flavour.



KA-55G



KA-75G



KA-95G



KA-115G

Model	KA-55G	KA-75G	KA-95G	KA-115G
Heating area(mm)	400×350	600×350	800×350	1,000×350
Power Consumption, Natural Gas	kW	10.5	15.7	20.9
	BTU	36,000	54,000	72,000
Power Consumption, LPG	kW	10.5	15.7	20.9
	BTU	36,000	54,000	72,000
Suitable Gas Hose Natural Gas	Natural Gas	13mm dia.	13mm dia.	20A
	LPG	9.5mm dia.	9.5mm dia.	20A
Dimension(mm)	W540×D610×H384	W740×D610×H384	W940×D610×H384	W1140×D610×H384
Net weight	45kg	55kg	70kg	80kg



Smokeless, get 850°C at 90 seconds. Juicy & crispy grilling!!  
Safe system; Low voltage 20V only running on the heater. Power supply of single phase 220V is used but heater voltage has been lowered to 20V by built-in transformer.



H-123YC



P-123KC



P-124KC



TAN-4

Model	H-123YC	P-123KC	P-124KC	TAN-4
Heating area(mm)	310×200	380×110	380×150	400×130
Power Consumption kW	3.8	3.4	4	3.4
Supply Voltage	220V 1ph	220V 1ph	220V 1ph	220V 1ph
Rated Amperage	18A	16A	19A	16A
Heating Material	Nichrome Wire	Nichrome Wire	Nichrome Wire	Nichrome Wire
Heating Control	3 Steps	3 Steps	3 Steps	On / Off Only
Dimension(mm)	W450×D600×H250	W520×D410×H380	W520×D410×H380	W630×D310×H290
Net weight	57kg	55kg	57kg	45kg

# Ice Shaver



SI-100E



FM-800E

Model	Block Ice SI-100E	Cube Ice FM-800E
Outer Dimension / Net Weight	W300×D385×H671(mm) / 32 kg	W314×D415×H503(mm) / 26 kg
Shaving Capacity	2.2~2.8(kg/min)	2.3~8.0(kg/min)
Supply Voltage / Power Consumption	220-240V (50 / 60Hz) 274-326W	220-240V (50 / 60Hz) 284-338W

# Ice Bowl Maker



AK-300

Cold Bowls-Use as decorative serving dish to keep food chilled!!



Ice bowl sample images

Model	AK-300
Outer Dimension	W376×D427×H750mm
Net Weight	20 kg
Making Capacity	1 pc. /15 seconds
Ice Bowl maximum size	within 205mmΦ / within height 110mm

# Beverage Warmer



SW30-E2



SW40-N2

Model	SW30-E2	SW40-N2
Outer Dimension	W248×D425×H484(mm)	W335×D425×H484(mm)
Net weight	9 kg	12 kg
Supply Voltage / Power Consumption	220-240V 284-338W	220-240V 274-326W

# Bun Steamer



100V only

MJ-45AL



BS460-EU

Model	MJ-45AL	BS460-EU
Outer Dimension	W400 × D500 × H756 (mm)	W478 × D535 × H854 (mm)
Net Weight	24.5kg	50kg
Capacity	5 inner trays(300×300mm)	5 inner trays (383×364mm)
Operating Temp.	75°C±1 (Ajustable)	75°C±1 (Ajustable)
Heating Method	Aluminum Die-casting Heater	Aluminum Die-casting Heater
Power Consumption / Supply Voltage	979W / 100V / 50Hz / 60Hz	1500W-1780W / 220V-240V / 50Hz / 60Hz
Display Light	Fluorescent Lamp (30W×1)	Fluorescent Lamp (30W×1)



# TAIJI

TAIJI & CO., LTD. (JAPAN)  
Sales and Marketing International Division  
Address: 8-2, Okawa-cho, Kawasaki-ku,  
Kawasaki-shi, Kanagawa, 210-0858 JAPAN  
Phone: +81-44-329-6338  
Fax: +81-44-329-5860  
URL: <http://www.taiji.co.jp/e>



220715000