

# INSTRUCTION MANUAL

## HEAT LAMP

Model

**SL-25(BA)/SL-25(CL)**

Thank you very much for purchasing our heat lamp.

CAUTION: Read the instructions before using the product.

### 【Contents】

■Product Specifications· . . . .	1
■Safety Precautions· . . . .	2 ~ 4
■Purpose of Use· . . . .	4
■Operational Mechanism· . . . .	4
■Designation of Parts· . . . .	5
■Checking Prior to Use and Setting· . . . .	5
■Installation· . . . .	6 ~ 7
■Replacing Infrared Bulb· . . . .	8
■Daily Cleaning· . . . .	8
■Safety Check List· . . . .	9
■After-Purchase Servicing· . . . .	9



## Product Specifications

Model	SL-25(BA)	SL-25(CL)
Rated voltage	Single-phase 110V/220V, 50/60Hz	
Infrared bulb	185W (E27)	
Outer dimensions	W257xD366 ~ 600 x H650 ~ 800mm	W172xD366 ~ 600 x H650 ~ 800mm
Basement dimensions	W257xD366mm (Base plate)	W116xD133mm (Clip)
Net weight	4.9kg	3.6kg
Accessories	185W Infrared bulb/Hexagonal wrench (for CL)	
Manufacturer	TAIJI & CO., LTD.	
Country of manufacture	Japan	




The specifications or appearance are subject to change without notice.









## Safety Precautions










- Please peruse these "Safety Precautions" carefully so that you can use this product in the proper way.
- Please keep these "Safety Precautions" handy for future reference after being read.
- Precautionary measures referred to herein are matters which should be abided by for safe use and to prevent harm and/or damage being inflicted on yourself or others. "Warning" and "Caution" to express the degree or extent of conceivable harm and damage which can be assumed to occur from mishandling. They are both of importance as far as safety is concerned and should be strictly abided by.






	<b>WARNING</b>	What is assumed to possibly result in serious injury or death.
	<b>CAUTION</b>	What is assumed to possibly result in physical injury or property damage.












- What precautionary measures should be abided by are expressed by certain marks and explained as follows.

	△ indicates "Warning and caution is urged." (The one on the left indicates beware of high temperature)
	⊘ indicates "Forbidden." (The one on the left indicates high disassembling forbidden.)
	● indicates "Instructions" which should be followed by all means.

 <b>WARNING</b>	
	Attention required for setting (1) To be set upon a stable and flat location and not to be moved while plug is connected to power source. Failure to install could result in fall, electric shock or injury .
	Attention required for setting (2) Ensure power source is from dedicated outlet of 110V or 220V and over 10A (for 110V) or 8A (for 220V). Failure to observe the power supply requirements may result in electric shock or fire.
	Inspect and clean (3) Periodically confirm that the plug contacts are kept clean and that they are firmly inserted in the power outlet. Dust accumulation or imperfect contact could be the cause of an electric shock or fire.
	Disassembling forbidden (4) Absolutely should not be disassembled, repaired or modified by anyone other than repair technician. Could result in electric shock, fire, or dropping.
	Forbidden (5) Handle the power cord with care. In case the power cord is processed, pulled, bundled, or a heavy item is placed upon or squeezes it, the cord is apt to be damaged and could cause an electric shock or fire. The power cord should not come into contact with a heat source.
	Forbidden (6) Do not cover with flammable such as cloth or paper. Could result in fire.
	Forbidden (7) Do not intentionally bend plug contacts to prevent the plug from dropping out of the electric outlet. Imperfect contact could be the cause of fire.

 <b>WARNING</b>	
 Outdoors forbidden	(8)Do not use outdoors. Using the product where there is rainfall could cause electric leakage and/or electric shock.
 Dousing with water forbidden	(9)Do not immerse in or douse with water. Such could result in electric shock or short-circuit.
 Humid forbidden	(10)Do not install at humid place. Insulation may decline and it could cause electric leakage or electric shock.
 Removing plug	(11)In the event of abnormal odor or sound, emission of smoke, or in case water or a foreign substance should enter the inside, switch off the product immediately and remove the plug from the electric outlet. Then, contact the store where you have purchased this product, nearest TAIJI sales representative or TAIJI & CO., LTD. in Japan
 Attention required for using	(12)This appliance can be used by children aged from 16 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Keep them away from the product. -Children shall not play with the appliance. -Cleaning and user maintenance shall not be made by children without supervision.
 Discarding forbidden	(13)Discarding of this product should be requested of specialized contractor, public agency, or the distributor from where the product was purchased. (A disposal fee is usually charged.) Discarding it at random could result in third party remodeling, using it for purpose other than as designed, which could result in an unexpected accident. (14)Do not use at the place where is affected by heat like a place near stoves or gas cooker. Also avoid the moist place to use. Could result in an electric shock or fire.
 Multi-outlet forbidden	(15)Use an exclusive wall outlet rated at the power 110V or 220V. Do not use multi-outlet extension cord. It may result in fire.
 Grounding connection	(16)Ensure grounding is connected. Imperfect grounding could lead to electric shock.

 <b>CAUTION</b>	
 Hold plug to remove	(1)Hold the plug head and not the cord when removing the plug from the electric outlet. Not doing so could result in electric shock or ignition.
 Caution	(2)The product must be installed by a qualified electrician. Installation electrical work
 Caution	(3)Do not drop this product or inflict severe shock to it. It could result in failure or fire.
 Forbidden	(4)Handle the power cord with care. In case the power cord and/or plug is damaged, do not use it. Could result in electric shock, short-circuit or ignition.

 <b>CAUTION</b>	
 Forbidden wet hands	(5) Do not touch or manipulate electrical parts such as the plug, power source switch, etc with wet hands, It could be the cause of electric shock.
 Caution! High temperatures	(6) Do not touch exterior surface on the product, bulb, and vicinity of the bulb during operation and/or right after the operation. It will get hot and could result in burn.
 Caution! High temperatures	(7) Turn off power and allow the product to cool before replacing the bulb or performing any cleaning, adjustments and/or maintenance. If you touch immediately after the operation, it could result in burn.
 Caution	(8) Use an exclusive bulb showing on the rated label as well as in the Replacing Bulb section. Failure to use the proper bulb could result in fire.
 Caution	(9) Do not turn off power during warming foods. The temperature will drop and the foods may be spoiled. (10) Prolonged heating may cause a loss of taste and flavor of the foods.
 Caution	(11) Do not use benzene, alcohol and polishing powder. It may cause scratch, discoloration, and deformation.
 Caution	(12) Discard immediately the polyethylene bag that the product was packed inside. Keep it out of children's reach to prevent incidents of suffocation.
 Caution	(13) Do not install in close(tight) contact with the other products. It may cause discoloration and deformation due to overheating.
 Removing plug	(14) Remove the plug from the electric outlet as soon as thunder is heard. In the event of a nearby lightning strike, abnormal current/abnormal voltage could infiltrate through the power source line, etc. and possibly damage the product.
 Removing plug	(15) Switch off and remove the plug from electric outlet when not in use. If you do not, it could be the cause of electric shock, electric leakage, fire, etc.


## Purpose of Use

This product is an electric heat lamp for indoor use and is fabricated to warm precooked foods. Do not use it for any other purpose.

## Operational Mechanism

This product is equipped with an infrared lamp to keep precooked foods warm.


## Designation of Parts

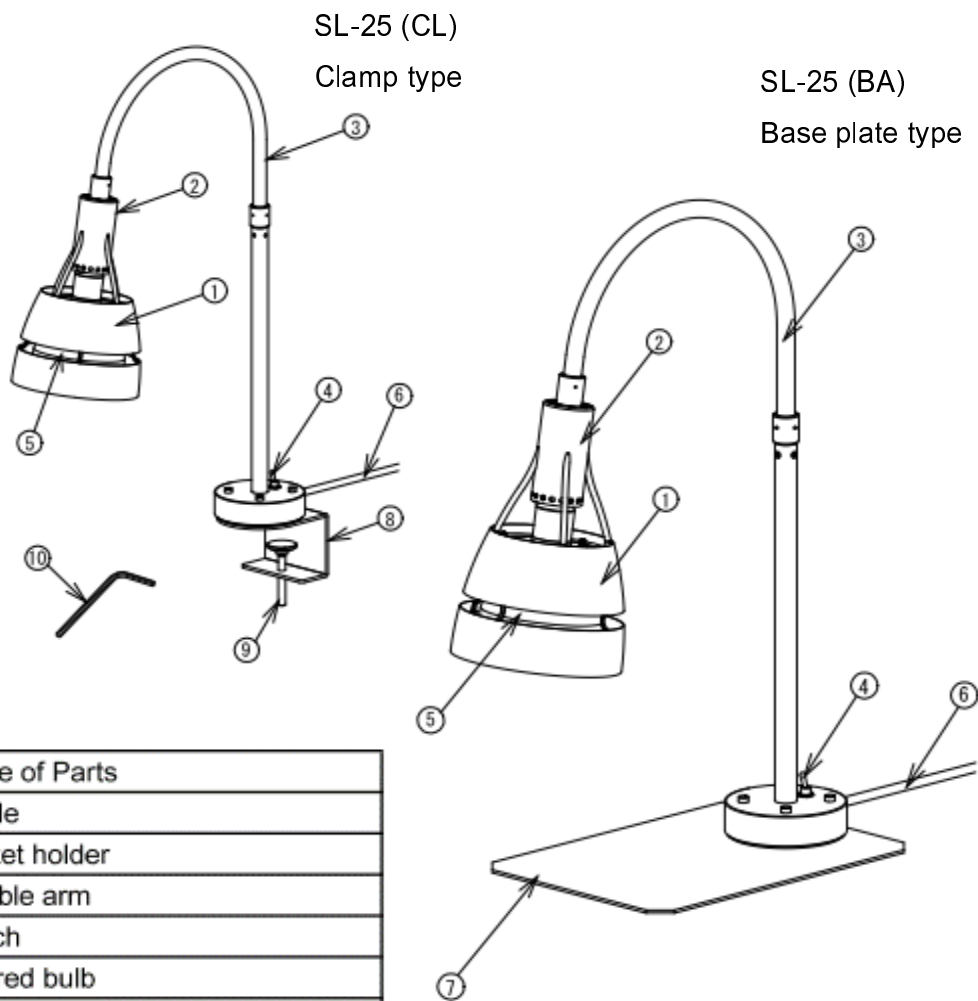

NO.	Name of Parts
1	Shade
2	Socket holder
3	Flexible arm
4	Switch
5	Infrared bulb
6	Power cord
7	Base plate (for BA)
8	U-shape mounting bracket (for CL)
9	Bolt (for CL)
10	Hexagonal wrench (for CL)

## Checking Prior to Use and Setting

1. Remove the product from packing carton and make sure that Instruction Manual and Accessories are included.
2. Remove the polyethylene bag, tape and protective cushioning from the product.
3. Install a bulb included into the package. (Ref. page 8 "Replacing Infrared Bulb")

 Caution! High temperatures	In case of replacing a bulb, move the I/O (on/off) Switch to the O (off) position and remove the plug from electric outlet to avoid burns.
---	--

## Installation


Make sure the following information and procedures to install the product.


■ Make sure the installation site is proper condition as follows:

- At place where it is flat and stable.
- At place where it is not affected by heat and avoid places where there is direct sunlight, and near stoves, microwave and etc.
- At place where there is space all around the product to allow ventilation.
- Away from moist places or where it is susceptible to being splashed with water.

■ To adjust the position of lighting by Flexible arm, turn OFF power and allow product to cool completely and use caution when touching these areas before adjustment.

Hold the both ends of Flexible arm like as shown on the right and adjust the position.


 <p>Caution! High temperatures</p>	In case of touching Flexible arm, move the I/O (on/off) Switch to the O (off) position and allow the product cool completely before adjustment to avoid burns.
---	--

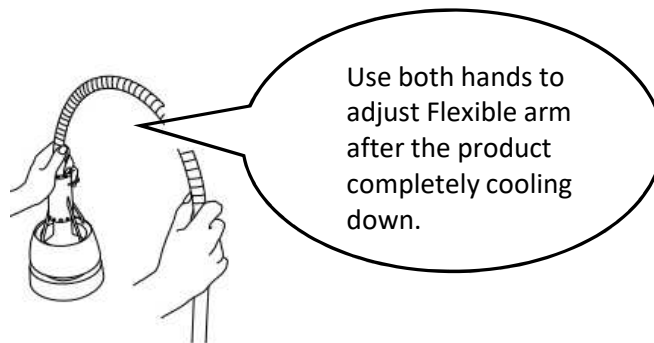

■ Adjustable range is within 90° in both (right/left) direction.

The arm may get loose and lose holding force if you adjust by over 90°.

Do not twist Flexible arm. It may lose holding force.

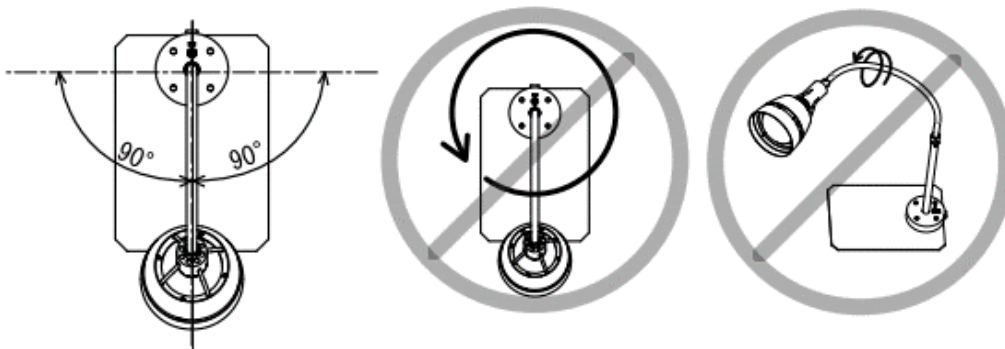



■How To Install SL-25 (CL) clamp type


Mount the clamp to 10~65mm thick of durable table or worktop using Hexagonal wrench provided with the product.



Caution:

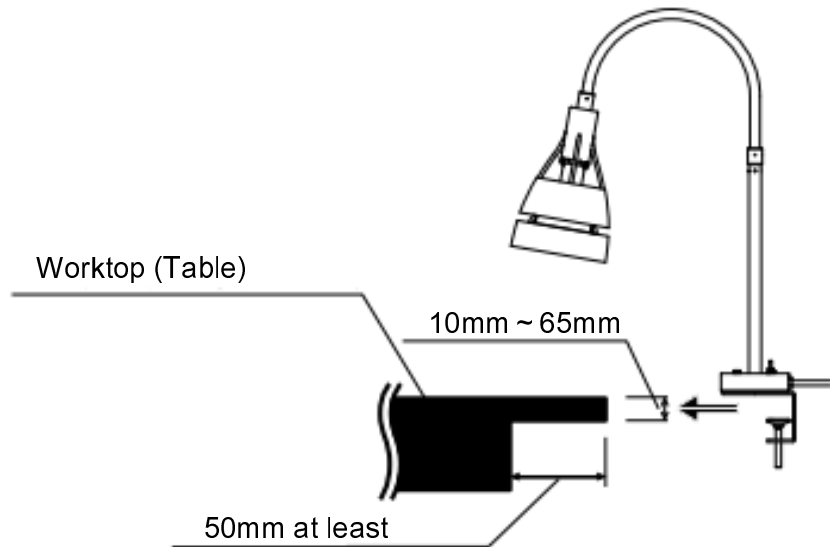
Turn off the circuit breaker or power switch at mounting location before installation of the product.



 <p>Caution:</p>	<p>Do not put inflammable substance such as aerosol can, plastic, oil and paper around the product and irradiation area.</p>
---	--


 <p>Caution! High temperatures</p>	<p>Do not touch exterior surface on the product that will get very hot during operation or right after operation.</p>
---	---

  <p>Caution:</p>	<p>The worktop surface temperature directly under the bulb may get over 100°C when the bulb height is less than approx. 200mm. Provide over 300mm clearance from the worktop surface to the bulb. When the worktop is made from inflammable, it may cause change of shape or fire.</p>
---	--

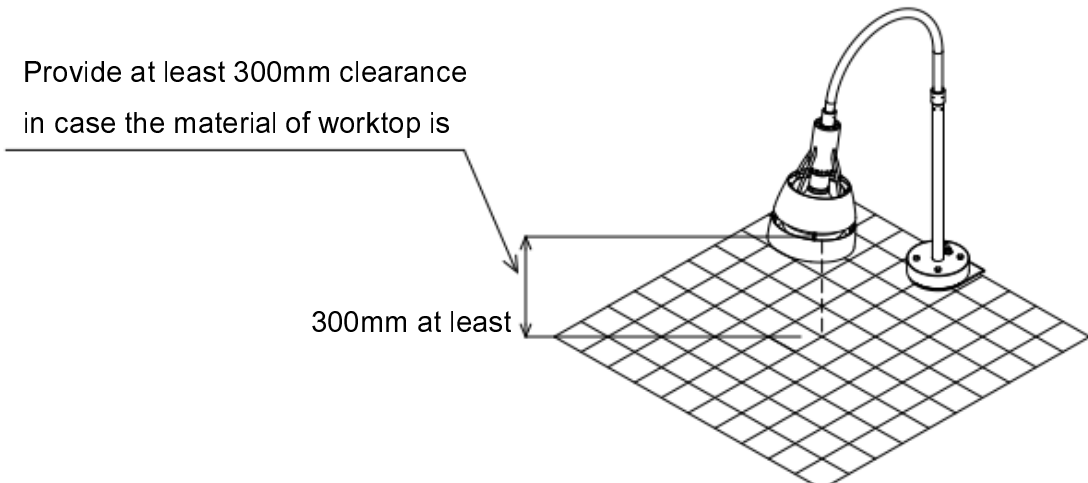

## Replacing Infrared Bulb

1. Move the I/O (on/off) Switch to the O(off) position and allow the product and bulb to cool completely.
2. Unscrew the bulb from the product and replace with a new bulb.

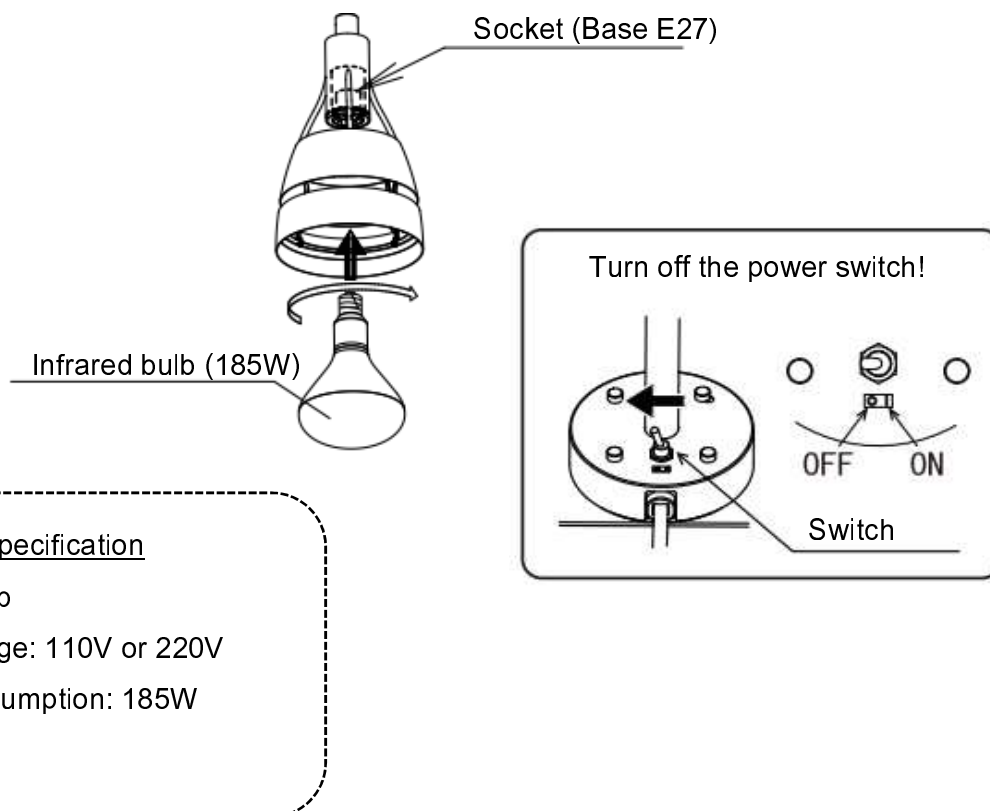

## Daily Cleaning

1. Move the I/O (on/off) Switch to the O(off) position and allow the product to cool completely.
2. Wipe down with a clean and soft dry cloth or tightly wrung wet cloth.

Stubborn stains can be removed with neutral detergent.

\*Do not use abrasive cleaners and cloths. It may scratch the finish of the product.

\*Do not use benzene, alcohol and polishing powder. It may cause scratch, discoloration, and deformation.



## Safety Check List

Conduct self check once a year.

If you have any check on the below list, please contact nearest sales representative or TAIJI & CO., LTD.

Symptom	Date of check	Result		
		/	/	/
1. The bulb is not lighting at all.				
2. When you move cord or product, the sometimes the bulb light is blinking.				
3. The plug and/or cord is excessive hot.				
4. There is a burning smell.				
5. The main electric leakage breaker has been activated when turn on the light.				
6. The cord and/or lamp holder is damage.				
7. It has passed over 10 years since purchasing.				
8. It may take for a while to turn on the light after replacing bulb.				
9. There is damage, deformation, or discoloration on the shade or other parts.				
10. There is crack or rust on the surface.				
11. There is ratting, loosening, and/or deformation on mounting parts.				
12. The inner surface of the bulb has turned black.				

## After-Purchase Servicing

For after sales service, contact the store where you have purchased this product or nearest TAIJI sales representative or TAIJI & CO., LTD. in Japan

If the supply cord is damage, it must be replaced by the service agent or similarly qualified persons in order to avoid a hazard.

TAIJI & CO., LTD.

8-2 Okawa-cho, Kawasaki-ku, Kawasaki-shi, Kanagawa 210-0858 Japan

TEL +81-44-329-6338

FAX +81-44-329-5860

Email [overseas@taiji.co.jp](mailto:overseas@taiji.co.jp)

URL <http://www.taiji.co.jp/e>